

## KT-100 Mini Door Controller

### Features That Make a Difference:

- Easy firmware updates
- Trouble supervision
- Fast and easy installation
- Interfaces with an external alarm system
- DC Powered Controller



### Compact and Versatile Single Door Controller

The KT-100 Mini Door Controller is compact and versatile with a space-saving design that incorporates all the components and equipment found in much larger controllers. Choose it for installations near a door, within a ceiling, involving turnstiles and parking gates. The KT-100 contains all the intelligence and necessary inputs/outputs to manage two readers on one door. Or link the KT-100 with other controllers (via RS-485 connection) to control thousands of readers.

### Easy Firmware Updates

KT-100 features flash memory for easy firmware updates. The controller's firmware can be updated from any EntraPass workstation in just a few minutes. Flash memory saves time by allowing system updates from a PC without having to update each controller individually.

### Trouble Supervision

The KT-100 constantly supervises the power supply, short-circuit and surge conditions and reports status to the EntraPass software. The power output is protected against short-circuits and surges by a self-resetting PTC. The equipment is also monitored for failure or tampering.

### Fast and Easy Installation

Mounts on the secure side of a door, reducing the length of cable required for installations. Has no DIP switches or jumpers to set. Includes connections for 2 card readers (entry/exit), lock device, door contact and request to exit. Mounting is easy: it can be placed on a single gang box (flush mount) or on a surface back box specially designed for it.

### External Alarm Interface

The KT-100 can interface with an external intrusion alarm system. An authorized individual can arm or disarm the alarm system simply by presenting his/her card to a reader.

### Network Connectivity

The KT-IP (IP controller module) provides affordable WAN/LAN network connectivity for the KT-100 mini door controller. In this setup, the KT-100 is first connected to a VC-485 (RS-232/RS-485 interface). Then the VC-485 is connected to the KT-IP. If there is a loss of communication with one of the controllers, the VC-485 will preserve communication with the other controllers. The KT-IP relays information between the KT-100 and the EntraPass Multi-Site Gateway.

## Physical

Dimensions (H·W·D) Inches . . . . 11.4cm H x 7cm W x 3cm D  
(4.5" x 2.75" x 1.25")

## Environmental

Operating Temperatures . . . . . From 2°C to 40°C (35°F to 110°F),  
Maximum 95% humidity, non-condensing

## Electrical

Input Power . . . . . 9.5 to 14 VDC/50 mA + accessories  
(maximum 750 mA)  
Battery Backup . . . . . 1 lithium battery, up to 10 year retention  
Door Strike Power . . . . . 12 VDC, 250 mA each, supervised  
Auxiliary Outputs (LED, BUZ) . . . . 2 outputs, open NPN collector for door  
access & status 25 mA maximum, 12 VDC  
each  
Control Relay Outputs . . . . . 2 relay outputs, 12V DC, 25 mA maximum/  
(R1, R2, R3, R4) each. Open collector to ground (use form C  
relays such as Kantech/KT-RM1 if needed).  
2 control relay outputs, 30 VAC/VDC, 50 mA  
(max) each. Two opto-isolated contacts per  
relay.  
Reader Power Outputs . . . . . 5 VDC @150 mA total, protected

## Operational

Compatible Reader Types . . . . . Wiegand, proximity, bar code, magnetic  
stripe, integrated keypad and others  
Monitored Points (Inputs) . . . . . 4 monitored points, NO/NC, with or without  
single end-of-line resistors  
Maximum Wiring Distance . . . . . 600 m (2,000 ft) – (AWG #22)  
Communication Ports . . . . . RS-485  
Communication Speed . . . . . From 1,200 to 115,200 baud  
(automatic detection)  
Firmware Flash Memory . . . . . 64K  
RAM Memory . . . . . 128K, protected by a lithium battery  
Network Autonomy . . . . . Distributed data and processing


## Regulatory

Certifications/Listing . . . . . FCC Part 15, Class B; CE approved  
(EN 55022, EN 50130-4)

## Model Numbers

KT-100 . . . . . Mini Door Controller  
(requires 12 VDC power supply)  
MUSB-1WHT . . . . . KT-100 white color surface mounting box  
VC-485 . . . . . RS-232/RS-485 multi-function  
communication interface  
USB-485 . . . . . USB to RS-485 communication interface  
KT-IP . . . . . Kantech IP Link TCP/IP interface

## Basic System Diagram

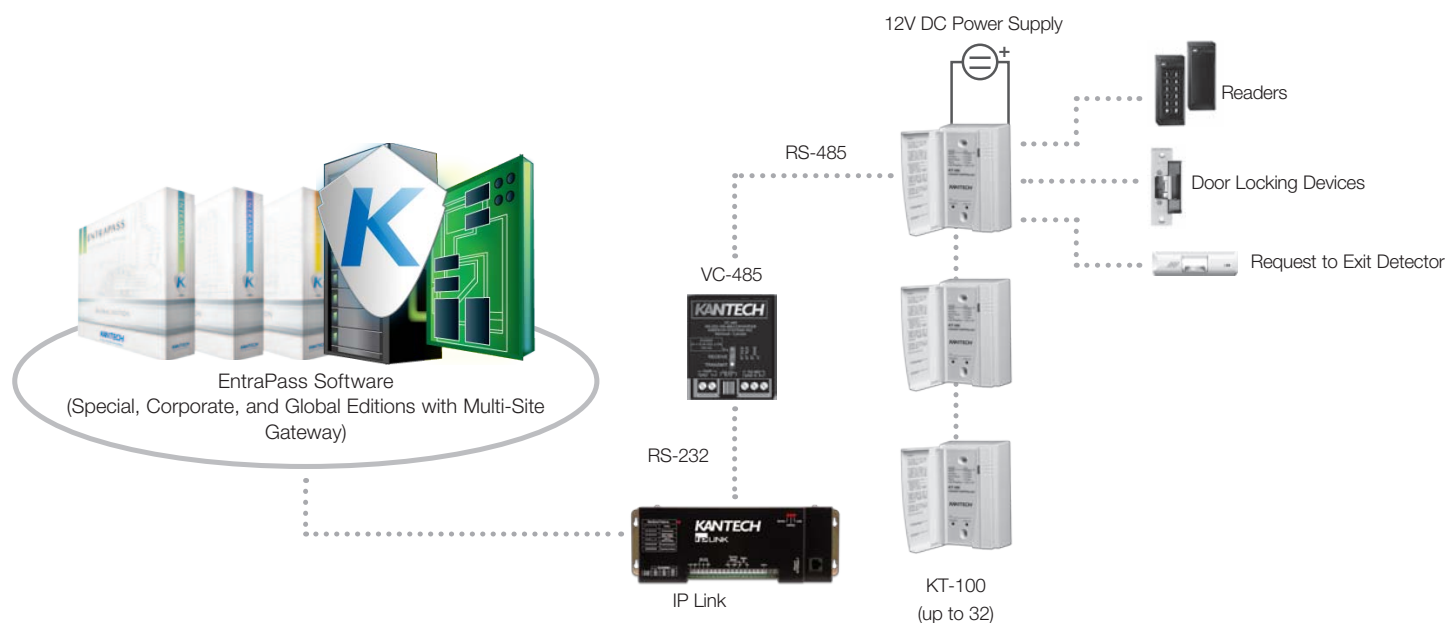

## Related Products



USB-485



Kantech IP Link  
TCP/IP Interface



EntraPass Security  
Software

## Approvals

